



## 10 ton Electric Chain Hoist w/ Power Trolley Variable Speed Trolley 208~240V / 440~480V 3 $\phi$ 1/2 60HZ 40ft G100 Nickel Duty H4/M5


### Características Esenciales

- 3 Años de Garantía, Servicio y Atención al Cliente en Mexico

## Especificaciones Técnicas

Plug	Open Leads	Capacidad de Carga	10 ton
Altura de Izaje Estandar (Customizable)	40 ft / 12 m	Velocidad /min	10.63 ft @60Hz 2.7 mt @50Hz
Numero de Velocidades	1 Speed	Voltaje	3 Phase 208~240/480V 50/60Hz
Clase de Servicio	H4/M5/2m/Class D	Protección IEC Motor	IP55
Control	Pendant Control IP66	Voltaje del Control	24V
Tipo Transmisión / Reductor	Spur gearbox	Tipo de Cadena	G100 Nickel
Dimensiones de la Cadena	11.2 mm	Caidas de Cadena	4
Longitud de cadena	160	Humedad	20%~90%
Temperatura	-4 ~ 104° F / -20 ~ 40° C	Potencia del Trolley	750
Velocidad del Trolley /min	2.75~27.55 ft @60Hz 0.7~7 mt @50Hz	Cantidad de Velocidades	Variable
Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-38	Garantía	3 Year
Hoist Contactors Amps	25A	Hoist Contactor Brand	Schneider
Hoist Contactor Model	LC1D25B7C	Hoist Contactor Coil Voltage	24 V
IEC Hoist IP Protection	IP55	Pendant Control Yes No	Yes
IEC Pendant Control Protection	IP66	Pendant Control Emergency Stop	Yes
Pendant Control total Length	37 ft	Hoist Motor Power in KW	3+3
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V	Overload Protection	Overload Motor Clutch
Hour Meter	Internal Working Hour Meter	Brake rectifier half wave	DWBY DC/TE LHM

<b>Trolley Motor Brake Type and DC Voltage</b>	DC99V/DC207V	<b>Trolley Motor Insulation Grade</b>	F
<b>Trolley VFD Power in KW</b>	2.5kW	<b>Trolley VFD Brand</b>	z-230
<b>Trolley VFD Model</b>	huayuan	<b>Trolley Wheel Diameter</b>	139
<b>Trolley Wheel Material</b>	No. 45 steel	<b>Trolley Minimum Turn Radius</b>	2 m / 6.5 ft
<b>Trolley Beam Range</b>	3.9" to 7"	<b>Trolley Beam Extension Kit</b>	up to 12"
<b>Load Chain weight per foot [lbs]</b>	1.83	<b>1st Package Type</b>	Wood Crate
<b>2nd Package Type</b>	Wood Crate		

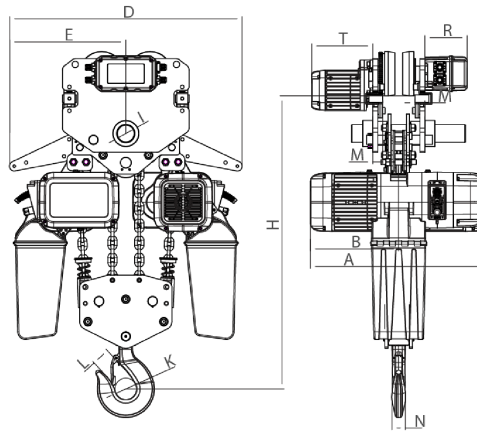

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
10	PWRXT10-04	1045	700	3500-5500	350	920	460	70	39	48	85	80	242	167

## Peso & Dimensiones

**Peso Total** 869 lbs / 395 Kg

## Detalles del Empaque

**H Altura Muerta** 39.57

**A Altura Total** 41.14

**D Depth** 27.56

**W Ancho** 36.22

**J Boca Gancho** 3.35

**Peso Total (sin cable o cadena)** 697.88

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso